



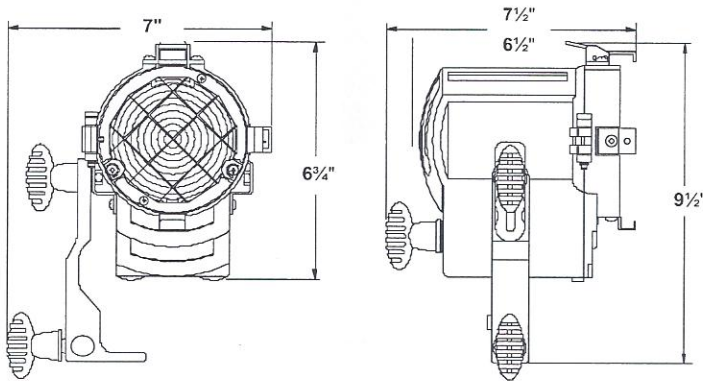

BAMBINO 500W, BAMBINO 200W Quartz Halogen Fresnel

- Improved light quality and output, producing a flatter and more even field
- High quality, rugged, durable
- Corrosion resistant for longer life
- Compatibility of parts throughout the range
- A comprehensive range of accessories, interchangeable with existing Quartzcolor products
- Easy to service and maintain
- Large focusing knob on rear
- New worm drive mechanism for precise focusing
- Die cast aluminum sliding side mount yoke
- Scratch resistant black non-reflective housing
- c UL us listed

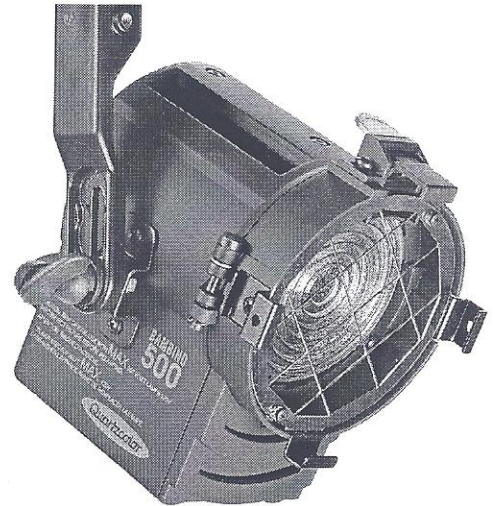

Operational data

Safety:

1" x 1" wire mesh guard.

Accessory fitting:

Stainless steel ears. Spring loaded top catch for retention of accessories.

Tilt adjustment:

Pivot located at center of gravity for excellent balance and positive locking.

Focus adjustment:

Rear focusing knob for smooth and precise action from spot to flood positions

Lamp access:

Hinged lens door allows easy access for lamp replacement.

Weights & dimensions


Lens diameter	3 1/2"
Accessory diameter	5 1/8"
Filter cut size	4 1/2" x 4 1/2"
Weight (head + yoke)	5 1/2 lbs
Packed weight	7 3/4 lbs
Packed volume	0.82 cu ft

Quartz Halogen Fresnels



Strand Studio Lighting

Photometric data

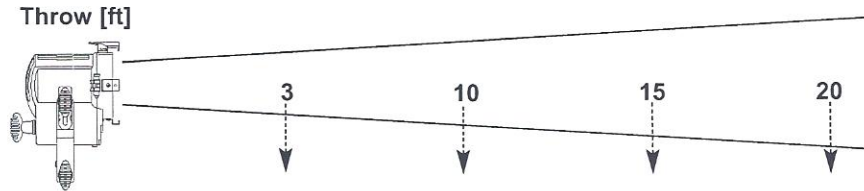

Bambino 200W - Typical performance based on FEV 200W lamp:

	FC	φ [ft]	FC	φ [ft]	FC	φ [ft]	FC	φ [ft]
SPOT (10.8°)	1733	0.6	156	2.0	69	3.0	39	3.9
FLOOD (45.3°)	446	2.5	40	8.4	18	12.5	10	16.7

Bambino 500W - Typical performance based on FRG 500W lamp:

	FC	φ [ft]	FC	φ [ft]	FC	φ [ft]	FC	φ [ft]
SPOT (10.8°)	4633	0.6	417	2.0	185	3.0	104	3.9
FLOOD (45.3°)	1122	2.5	101	8.4	45	12.5	25	16.7

Ordering information

Cat No Description

- 27616** Bambino 200W supplied with yoke, color frame, 8-leaf rotating barndoor
- 27626** Bambino 500W supplied with yoke, color frame, 8-leaf rotating barndoor

Optional Accessories

Cat. No Description

- 28103** Color frame
- 28108** 8 leaf barndoor
- 28107** Scrim set (two double scrims, one single scrim, one half double scrim, one half single scrim)
- 28104** Cone (adjustable)

Mechanical data

Paint / Finish:

Powder coated epoxy paint with special extra high temperature treatment in critical areas. External textured low gloss finish

Lamp house

Die cast aluminum

Mounting:

Die cast aluminum sliding side mount yoke 5/8" socket

Environmental Data

Max operating ambient temperature: 110°F

IP Rating: IP 20

Tilt recommended angle of use: -90° / 0 / 90°

Electrical data

Cable / Switching: 13' cable with in-line 15A/120V ON-OFF toggle switch

Standards compliance: c UL us listed

Lamp data Bambino 200W

Lamp code	FEV - 200W
LCL	1 ³ / ₈ "
Base	BA15d
Lumens	5500
Rated life hours (H)	50
Color temp. (K)	3200

Lamp data Bambino 500W

Lamp code	FRG - 500W
LCL	1 ¹³ / ₁₆ "
Base	GY9.5
Lumens	13000
Rated life hours (H)	150
Color temp. (K)	3200

Strand Lighting Inc

6603 Darin Way, Cypress, CA 90630, USA
Tel: +1 714 230 8200 Fax +1 714 230 8173

Strand Lighting (Canada)

Inc/Eclairages Strand (Canada) Inc

2430 Lucknow Drive No 15
Mississauga Ontario L5S 1V3 Canada
Tel: +1 905 677 7130 Fax: +1 905 677 6859



Strand
LIGHTING

The Company reserves the right to make any variation in design or construction to the equipment described.
© Strand Lighting Ltd. 2002
Strand™, Strand Lighting™, Strand Quartzcolor™ are trademarks of Strand Lighting Limited and Strand Lighting Inc.

www.strandlighting.com

BERLIN • HONG KONG • LONDON • LOS ANGELES • MOSCOW • NEW YORK • PARIS • ROME • TORONTO